



Indirect Modular

A modular fitting with PL lamps for both direct and indirect lighting

- Fits both standard and narrow table lay-in grid systems
- Each model provides a different ratio of direct/indirect light to produce a mellow, calming lighting effect
- Suitable for use in both retail and office environments
- High frequency control gear as standard
- 3 hour maintained emergency pack option
- IM2 is compliant with CIBSE LG3 Category 2
- Choice of single or twin 40/55 watt TCL lamp variants
- Pull up and Surface versions available

Indirect Modular Technical Information

- This range of recessed fluorescent luminaires combine the benefits of direct lighting from an LG3 Category 2 louvre or perforated tray, with the mellow and calming effect of indirect lighting produced from the "Gull Wing" design of the body.
- Three models are available: IM1 with central perforated basket; IM2 with back gull wing and central louvre compliant with CIBSE LG3 Category 2; IM3 with side perforated baskets.
- Each fitting provides a different ratio of direct/indirect light. The IM2 gives the most amount of direct light, ideal for use with DSE work stations, whereas the IM3 gives the least. Any combination of the IM range can produce the desired lighting effect.
- High frequency as standard
- These fittings are suitable for use in retail, general and office environments and install into both 15mm or 25mm exposed 'T' ceilings.
- The luminaire is manufactured from a combination of white polyester pre-coated aluminium and powder coated CR46P steel to enhance both aesthetics and light output characteristics.
- 3 hour maintained emergency versions available.
- Full technical data sheet and photometrics available on request.
- LightingDirect offer a free comprehensive lighting design and advice service.

Both direct and indirect light fitting with "Gullwing body" and PL lamps



IM1



IM2



IM3

Order Information


Code	Lamps	Kg	A	B	C
IM-1 S40	1 x 40w TCL	5.7	594mm	594mm	125mm
IM-1 T40	2 x 40w TCL	6.0	594mm	594mm	125mm
IM-1 S55	1 x 55w TCL	5.7	594mm	594mm	125mm
IM-1 T55	2 x 55w TCL	6.0	594mm	594mm	125mm
IM-2 T40	2 x 40w TCL	6.6	594mm	594mm	125mm
IM-2 T55	2 x 55w TCL	6.6	594mm	594mm	125mm
IM-3 T40	2 x 40w TCL	5.5	594mm	594mm	125mm
IM-3 T55	2 x 55w TCL	5.5	594mm	594mm	125mm

Control Gear

- HFR High Frequency Dimming
- DDC Digital Dimming Control
- E3 3 Hour Emergency Pack
- SM Surface Mount
- PU Pull up



Pull up option

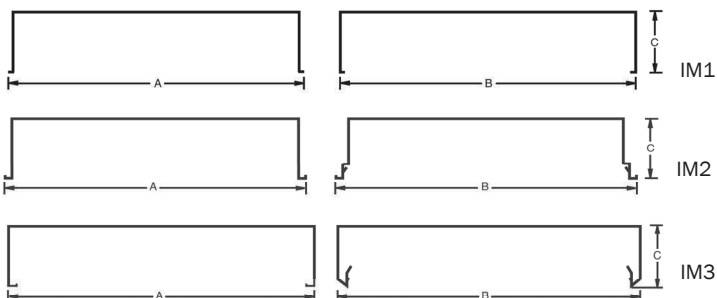

Surface mounted option SM